




TH623

2-3 Poli

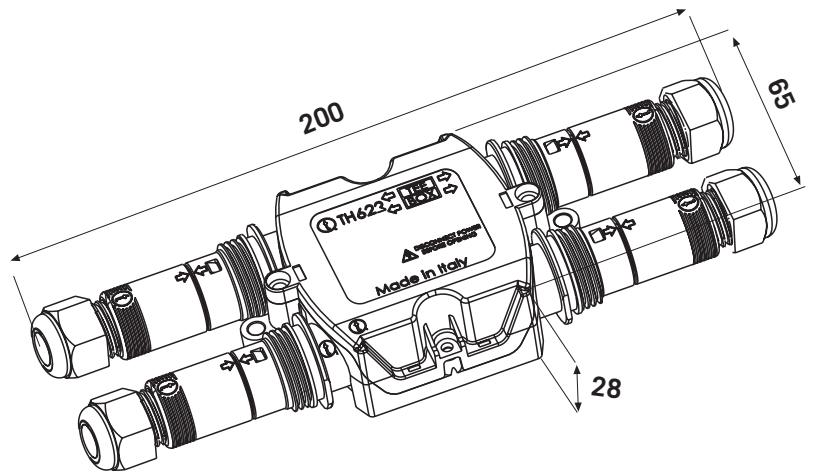

Distributore di corrente MAX 16 A, con 1 entrata e fino a 3 uscite. Facilità d'utilizzo. Connessione a bussola.

Current distributor MAX 16 A, with one input and up to 3 outputs. Easy use. Bush connection.

Dati tecnici - Technical data

IP20

IP40

IP54

MAX 16 AMP
INPUT 16 AMP
OUT 1+OUT 2+OUT 3 = 16 AMP
TEST REPORT
HEATING RESISTANCE

T85-16 A- 2,5°

Materie prime - Raw materials

Materia plastica - Plastic

■ Nero - Black	} PA66 UL94	-20°C
□ Grigio - Grey RAL 7035		
	} V2 GWT 850°C	+125°C

Connessioni - Connection

Vedi schede TH 380 - TH382 - TH 384
See TH 380 - TH382 - TH384 data sheets

Gomme - Rubbers

SEBS - TPE V



Vite 3 x 12 INOX ANTISVITAMENTO
Screw 3 x 12 STAINLESS STEEL ANTISCREW

Cavi interni - Inner cables

Cablaggio interno con connessioni cilindriche su cavi in rame sezione 2,5² guaina in silicone

Inner wiring with connectiones cylindrical crimped on 2,5² section copper cables. Silicon protective covering.



Ottone Argentato
Silver plated brass

Norme - Standards

EN 61984:2001
EN 60529:1991+A1:2000
EN 60998-1:2004
heating resistance



Codice - Part number

THH.623.XXX

IP20 Connessione senza serracavo, aggancio a clip
Connection without cable clamp, clip clamping



2 poli poles

THH.623.A2A.AG Nero - Black

THH.623.A2B.AG Grigio - Grey RAL 7035

Connessione
Connection

MALE-PLUG THB.380
3 Uscite-Output
FEMALE-SOCKET (POWER) THB.380
1 Entrata-Input

3 poli poles

THH.623.A3A.AG Nero - Black

THH.623.A3B.AG Grigio - Grey RAL 7035

Connessione
Connection

MALE-PLUG THB.380
3 Uscite-Output
FEMALE-SOCKET (POWER) THB.380
1 Entrata-Input

AG= Ottone Argentato - Silverplated brass

IP40 Connessione con serracavo max Ø cavo 9,5 mm, aggancio a clip
Connection with cable clamp max Ø 9,5 mm cable, clip clamping



2 poli poles

THH.623.B2A.AG Nero - Black

THH.623.B2B.AG Grigio - Grey RAL 7035

Connessione
Connection

MALE-PLUG THB.382
3 Uscite-Output
FEMALE-SOCKET (POWER) THB.382
1 Entrata-Input

3 poli poles

THH.623.B3A.AG Nero - Black

THH.623.B3B.AG Grigio - Grey RAL 7035

Connessione
Connection

MALE-PLUG THB.382
3 Uscite-Output
FEMALE-SOCKET (POWER) THB.382
1 Entrata-Input

AG= Ottone Argentato - Silverplated brass

Eventuali modifiche e migliori sui dati tecnici o sul prodotto potranno essere effettuate senza preavviso.
All technical data or other eventual product modifications and improvements can be carried out without notice

IP54 Connessione serracavo Ø 9,5 mm, aggancio a ghiera
 Connection with cable clamp max Ø 9,5 mm cable, screwing clamp
 200 mm CHIUSA - CLOSE



2 poli
poles

THH.623.C2A.AG Nero - Black
 THH.623.C2B.AG Grigio - Grey RAL 7035

Connessione
Connection

- MALE-PLUG THB.384
3 Uscite-Output
- FEMALE-SOCKET (POWER) THB.384
1 Entrata-Input

3 poli
poles

THH.623.C3A.AG Nero - Black
 THH.623.C3B.AG Grigio - Grey RAL 7035

Connessione
Connection

- MALE-PLUG THB.384
3 Uscite-Output
- FEMALE-SOCKET (POWER) THB.384
1 Entrata-Input

AG= Ottone Argentato - Silverplated brass


Kit di fornitura non assemblato THH
Unassembled kit THH

THH.623.XXX.XX 50 PZ

Scelta delle versioni - Versions choice
Bussole - Insert

Kit di fornitura imbustati THR
Fare riferimento a catalogo THR
Retail packed kit THR
Please refer to THR Retail Catalogue

THR.623.SXX.XX

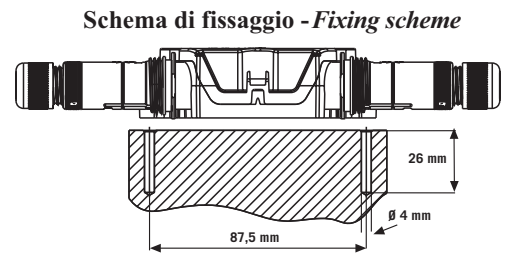

Kit di fornitura con versionamenti e confezionamenti speciali THK
Special custom packed version THK

THK.623.XXX