



<b>TEST REPORT INSTRUMENT EN 60998-1:2004</b>	
Report Reference No. ....	: 94497-3TRFINS
Tested by.....	: Fabio Mauri 
Verified by .....	: Alessio Pelizzoni 
Date of issue .....	: 2007-10-19
<b>Testing Laboratory</b> .....	: <b>Nemko Spa</b>
Address .....	: Via del Carroccio 4, I-20046 Biassono MI (Italy)
Testing location/ procedure.....	: Full application of Harmonised standards <input checked="" type="checkbox"/> Partial application of Harmonised standards <input type="checkbox"/> Other standard testing methods <input type="checkbox"/> Non-standard testing methods <input type="checkbox"/> SINAL accredited test report <input type="checkbox"/>
Testing location/ address .....	: Nemko Spa via del Carroccio snc, I-20046 Biassono MI (Italy)
Applicant's name.....	: <b>Techno srl</b>
Address .....	: via Bancora e Rimoldi , 27- 22070 Guanzate (CO) Italy
<b>Test specification</b>	
Standard.....	: EN 60998-1:2004
Test procedure .....	: Nemko WM L0177
Non-standard test method.....	: N/A
<b>Test Report Form No.</b> ....	: TRF EN60998-1
TRF Originator .....	: Nemko Spa
Master TRF .....	: 2005-04
<b>Nemko Spa, I-20046 Biassono MI, Italy. All rights reserved.</b>	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Nemko Spa is acknowledged as copyright owner and source of the material. Nemko Spa takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
<b>Test item description</b> .....	: Connector box system
Trade Mark.....	: Techno
Manufacturer .....	: Techno S.r.l.
Model.....	: TH 209
Ratings .....	: T=85°C, 16A, 1.5°

*This test report may not be partially reproduced, except with the prior written permission of **Nemko Spa***

<b>Test Report No. : 94497-3TRFINS</b>	2007-10-19 Date of issue
--	-----------------------------

**Type / Model** : TH209

**Equipment** : Connector box system

**Applicant** : Techno srl

**Address** : via Bancora e Rimoldi , 27- 22070 Guanzate (CO) Italy

**Manufacturer** : Techno srl

**Address** : via Bancora e Rimoldi , 27- 22070 Guanzate (CO) Italy

<b>Test Result</b> (according to the standards on page 4)	<b>POSITIVE</b>
--	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>4</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>2.1</b>	<b>POWER SUPPLY SYSTEM UTILISED</b>	<b>5</b>
<b>2.2</b>	<b>SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)</b>	<b>5</b>
<b>2.3</b>	<b>EUT OPERATION MODE:</b>	<b>5</b>
<b>2.4</b>	<b>EUT CONFIGURATION:</b>	<b>5</b>
<b>2.5</b>	<b>PERFORMANCE LEVEL</b>	<b>5</b>
<b>3</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>6</b>
<b>3.1</b>	<b>ADDRESS OF THE TEST LABORATORY</b>	<b>6</b>
<b>3.2</b>	<b>ENVIRONMENTAL CONDITIONS</b>	<b>6</b>
<b>3.3</b>	<b>DEFINITIONS OF SYMBOLS USED IN THIS TEST REPORT</b>	<b>6</b>
<b>3.4</b>	<b>STATEMENT OF THE MEASUREMENT UNCERTAINTY</b>	<b>6</b>
<b>4</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>7</b>
<b>5</b>	<b><u>USED TEST EQUIPMENT</u></b>	<b>8</b>
<b>6</b>	<b><u>FINALS RESULTS:</u></b>	<b>8</b>
<b>4</b>	<b><u>PHOTOS</u></b>	<b>9</b>

## 1 TEST STANDARDS

The tests were performed according to following standards:

<u>EN/IEC 60998-1:04</u>	Connecting devices for low-voltage circuits for household and similar purposes -- Part 1: General requirements (Only §15 and 16)
<u>Nemko WM L0177</u>	Nemko S.p.A. Technical Procedure Use of measuring equipment to perform standards tests
<u>Nemko WM L1002</u>	Measurement Uncertainty - Policy and Statement

## 2 SUMMARY

### GENERAL REMARKS:

The Temperature rise test was performed in a oven in accordance with clauses 15 of standard EN 60998-1.  
The Resistance to heat was performed in a oven in accordance with clauses 16 of standard EN 60998-1.

### FINAL ASSESSMENT:

The equipment under test

**P - Pass**, Comply with the request of the standard

**F - Fail**, Not compdoes not fulfil the protection requirements cited on page 4.

**N - Not applicable**

Date of receipt of test sample	:	<u>2007-10-02</u>
Testing commenced on	:	<u>2007-10-09</u>
Testing concluded on	:	<u>2007-10-19</u>

## 2.1 Power supply system utilised

Power supply voltage :  230V/50 Hz / 1 $\phi$   115V/60Hz / 1 $\phi$   
 400V/50 Hz 3PE  400V/50 Hz 3NPE  
 12 V DC  Not relevant

## 2.2 Short description of the Equipment under Test (EuT)

The E.U.T. is a Connector box system.

Number of tested samples: 3

Serial number:

## 2.3 EuT operation mode:

The E.U.T. during the test work on normal use with max current load and with one ambient at the max temperature.

## 2.4 EuT configuration:

EUT was equipped with its specific cable during the tests.

1.5mm<sup>2</sup>

## 2.5 Performance level

The EUT complies with all the tests described on paragraph 15 and 16

### 3 TEST ENVIRONMENT

#### 3.1 Address of the test laboratory

Nemko Spa  
 Via Del Carroccio snc  
 I – 20046 Biassono MI – ITALY

#### 3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 17-28°C

Humidity: 30 ÷ 60%

Atmospheric pressure: 860-1060 hPa

#### 3.3 Definitions of symbols used in this test report

**P** = Pass, **F** = Fail, **N** = Not applicable. Placed in the column to the right (Verdict)

#### 3.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to Nemko SpA Technical Procedure VML1002 and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Nemko Spa laboratory is reported:

<b>6.2 IP Grade Protection</b>					
<b>6.2.1 Water Flow</b>	The measurement uncertainty is the same defined by calibration certificates, giving the table.				
	<table border="1"> <thead> <tr> <th>Range</th> <th>Measurement Uncertainty</th> </tr> </thead> <tbody> <tr> <td>Water flow defined in EN 60529</td> <td>± 2 %</td> </tr> </tbody> </table>	Range	Measurement Uncertainty	Water flow defined in EN 60529	± 2 %
Range	Measurement Uncertainty				
Water flow defined in EN 60529	± 2 %				
<b>6.2.2 Probe Dimension</b>	The measurement uncertainty is the same defined by calibration certificates, giving the table.				
	<table border="1"> <thead> <tr> <th>Range</th> <th>Measurement Uncertainty</th> </tr> </thead> <tbody> <tr> <td>Probe dimensions defined in EN 60529</td> <td>± 2 · 10<sup>-2</sup> · L<sub>m</sub>/m</td> </tr> </tbody> </table>	Range	Measurement Uncertainty	Probe dimensions defined in EN 60529	± 2 · 10 <sup>-2</sup> · L <sub>m</sub> /m
Range	Measurement Uncertainty				
Probe dimensions defined in EN 60529	± 2 · 10 <sup>-2</sup> · L <sub>m</sub> /m				

This table has been extracted from the relevant Technical Procedure VML1002

#### 4 TEST CONDITIONS AND RESULTS

15	TEMPERATURE RISE		P
	Terminal .....	Multiway	X
	T marking (°C).....	<input type="checkbox"/> Yes 85(°C):	P
	Largest cross-sectional area (mm <sup>2</sup> ) .....	<b>1.5mm<sup>2</sup></b>	X
	Conductors.....	<b>1m</b>	P
	Torque (Nm); table number .....		X
	Rated connecting capacity (mm <sup>2</sup> ).....	<b>1.5mm<sup>2</sup></b>	X
	Test current (A) .....	<b>17,5A</b>	X
	Temperature rise does not exceed 45 K (1).....	<b>5°C</b>	P
	Temperature rise does not exceed 45 K (2).....		-
	Temperature rise does not exceed 45 K (3).....		-

16	RESISTANCE TO HEAT		P
16.2	Heating cabinet: no damage, after the test, markings still legible; test temperature (°C)	<input type="checkbox"/> T + 45 °C = 130 °C	P
16.3	Ball-pressure test (125 °C) for parts necessary to retain current-carrying parts in position	<b>Connector</b>	P
	Ball-pressure test for parts not necessary to retain current-carrying parts in position; test temperature (°C) .....	<input type="checkbox"/> 70 °C ( <b>Enclosure</b> )	P
	Diameter of impression not exceeding 2 mm .....		P

## **5 USED TEST EQUIPMENT**

Equipment used for testing are recorded and saved into the company archive as instruments 94497-INS.doc  
It will be made available if requested.

## **6 Finals Results:**

After the test according §15 the  $\Delta t$  measured doesn't exceed the 45K

After the heat test according §16.2 there is not access to live part even if the standard test finger is applied with a force of 5N.


**The connector models TH209 are considered comply with § 15 and 16 of EN60998-1:2004.**



**4 PHOTOS**




Connector models TH209 comply with § 15 and 16 of EN60998-1:2004. (T=85°C, 16A, 1.5°)

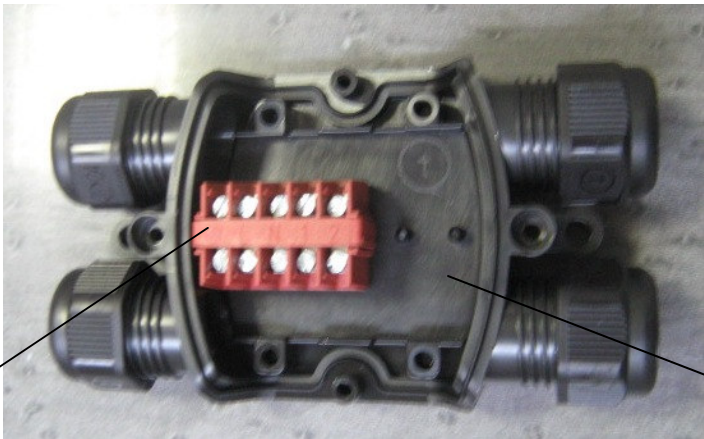

Ball Pressare test performed at 130°C according §16

E.u.t. general view,

Ball Pressare test performed at 70°C according §16

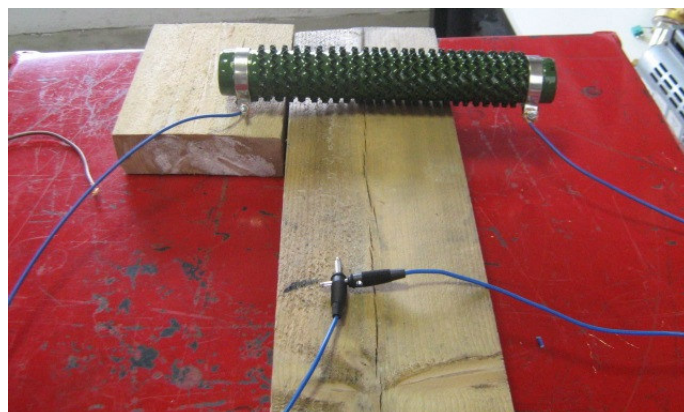

**Load used for Temperature rise test**